

....., « », , , « », ,

[1].

[2].

[3].

$$P_c = \dots_0 a^2 \sim + \dots_0 a^2 [1 - \chi_0 / 2 + 2(b - 1)] \sim^2 +$$

$$+ \dots_0 a^2 [2(1 - \chi_0 / 2)(b - 1) + 3(b - 1)^2] \sim^3 + \chi_0 \dots_0 E'$$

$$\mu = V_0 / (V - V_f) - 1, \quad \dots_0 -$$


, V_0 $V -$

, a b -

:

$$2G \left(v_{ij} - \frac{1}{3} v_{ij} \right) = \frac{dS_{ij}^0}{dt} + \dots S_{ij},$$

$$dS_{ij}^0 / dt -$$

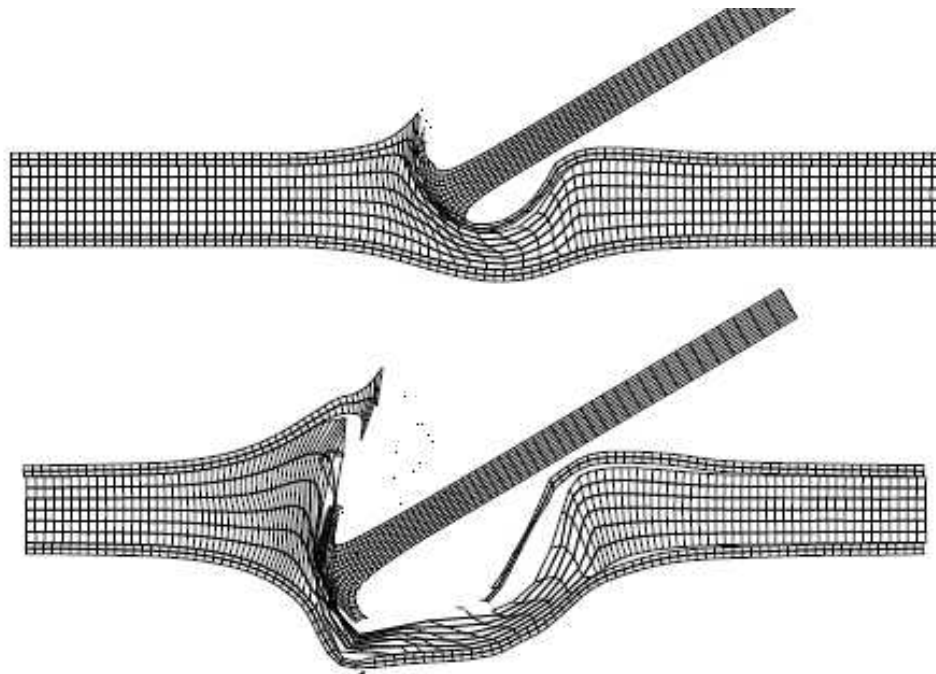

. 1 -

700 /

. 1

()

1.

2. Zeumer B. Mechanical properties and high-temperature deformation behavior of particle-strengthened NiAl alloys //Materials Science and Engineering A.-1995.- Vol.192-193,Part 2. -P. 817-823.

3.

// . 1997. . 355. 2. . 192-195.